

III Reparte


SHADES OF NATURE WITH MATT AND GLOSSY FINISH

Eight colours, a single modular 800x2400mm size, a selection of Natural shades reflect today's taste. Make way for colour, for shades, for glossy and matt surfaces, with cracking effects and for decorations that in the form of combinations, matches, lights and shadows, play with lively elegance within space.





Variant options for Maximize your style

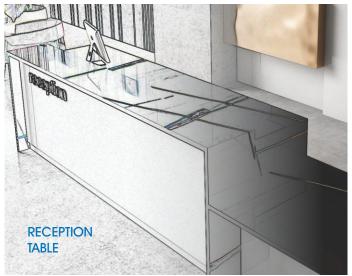

APPLICATION AREAS:



Unit Top

Ħ

Table Top

	⊕
D	oor/window

Frame

ſ



Furniture Wash Basin









Outdoor Area

Step & Riser

#‡ ////

Traffic Area

	1 P-
	- B



Living Area

An old soul, a modern styling. The veins and fascination of marble are unchanged, what changes is the space, which is more modern and releases the creative identity of the material in variant application like reception table, stair case, Bath tub, Furniture, Etc, through a contemporary perspective. Eight colours, two surfaces (glossy and matt) available in 800x2400mm size elegantly emphasize the designs, establishing an inseparable bond between styling and architecture.



CASE

Bath Tub





Door Frame



Indoor Sitting

Office Table

Counter Top



TILE THAT BUILT TO PERFORME

Stunning Visual Paired with touchable textures that don't freeze, fade or crack.

FEATURES :

Making the large size slab tiles in various size, range and with bigger, durable & natural surface you have ever seen. Nothing can be compared with beauty of Arlo Fullbody Tiles.



High durable



Dimensional stability



Acid resistance





Easy to clean



Maintenance free

 \frown

 \mathfrak{B}














EDGE PROFILES

Our designs are available in glossy and Matt finishes and different types of edge profiles to expand your design options. Offering unmatched durability with no maintenance, easy-care convenience, and superior stain resistance, we back our surfaces with a transferable Full Lifetime Warranty to ensure years of flawless service.

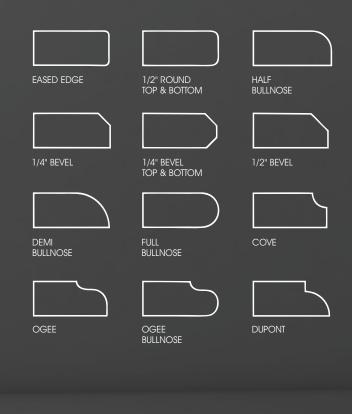

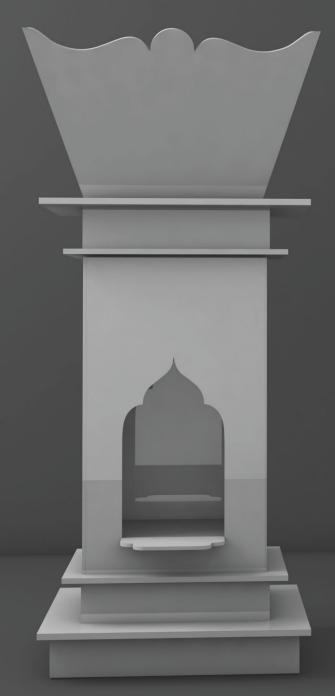

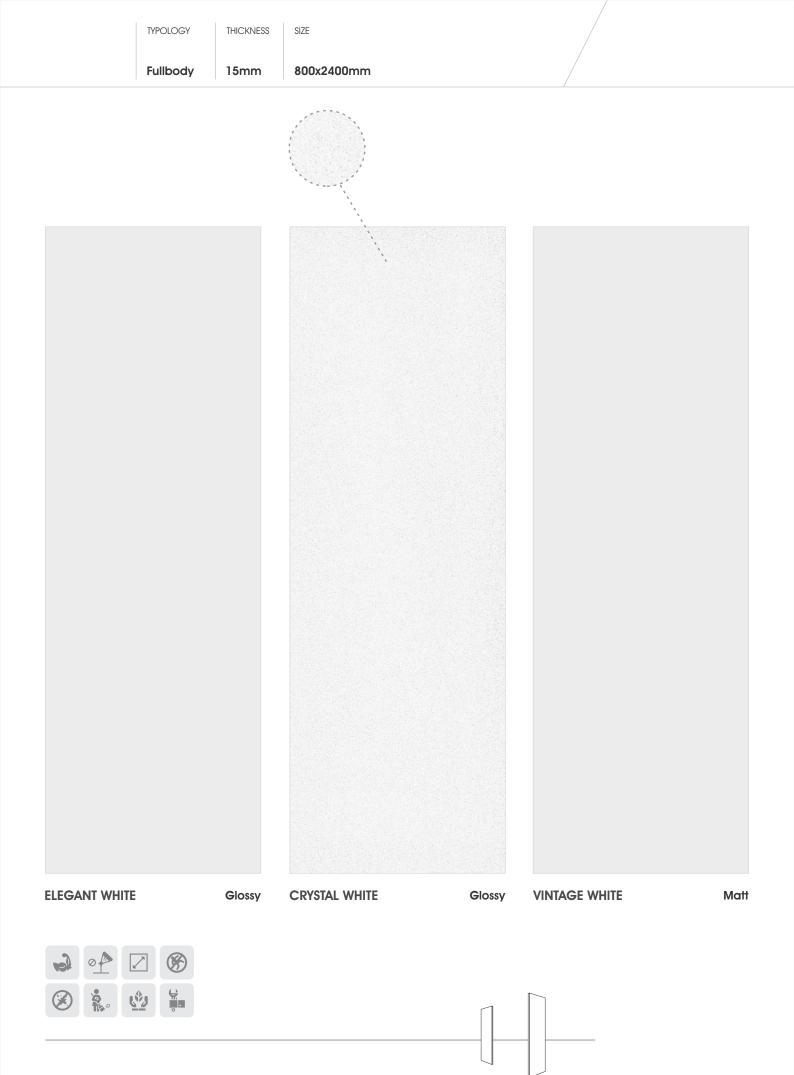

	Fullbody	15mm	800x2400mm		
0,,,0					
		10			
					bec
					, OS
					/er/
		11 and			l ev
					<u>.</u> 2
					Ctio
				A STAND	rfec
					defure the perfection in every aspect
					Je
					R


THICKNESS

SIZE



Crystal White

TYPOLOGY	THICKNESS	SIZE
Fullbody	15mm	800x2400mm





GRAFITO CHIPS

Glossy



Glossy

●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲
●▲

GRAFITO BLACK


Matt



THICKNESS

SIZE

Grafito Chips

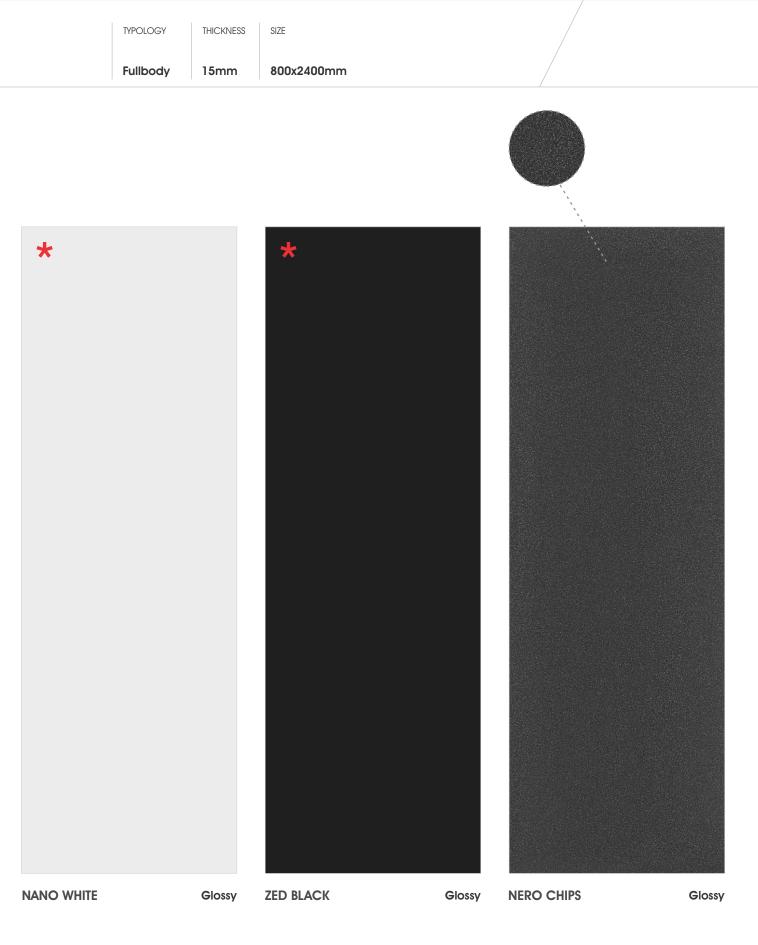




*Glazed application

TYPOLOGY	THICKNESS	SIZE	
Fullbody	15mm	800x2400mm	






TYPOLOGY	THICKNESS	SIZE
Fullbody	15mm	800x2400mm

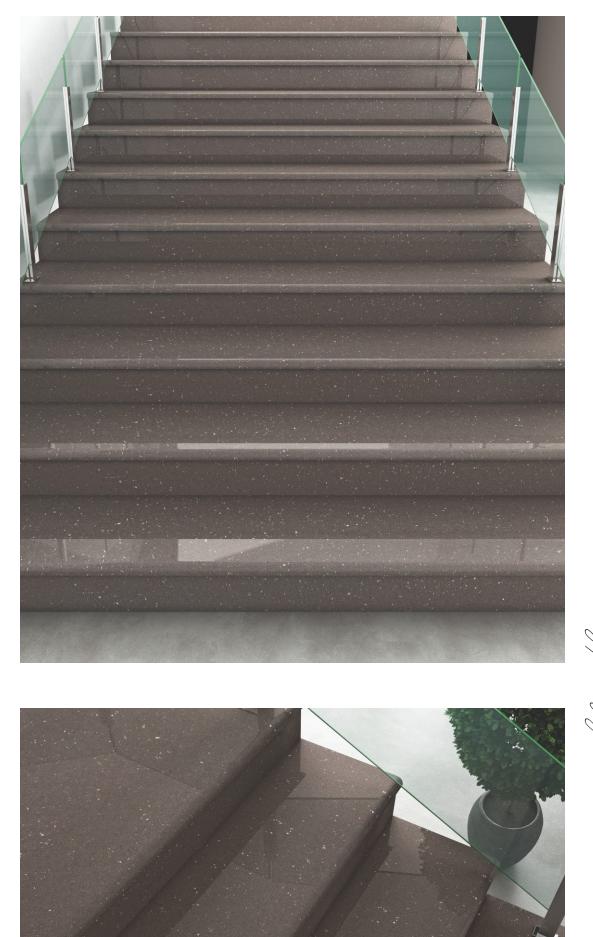

letre the perfection in every aspect

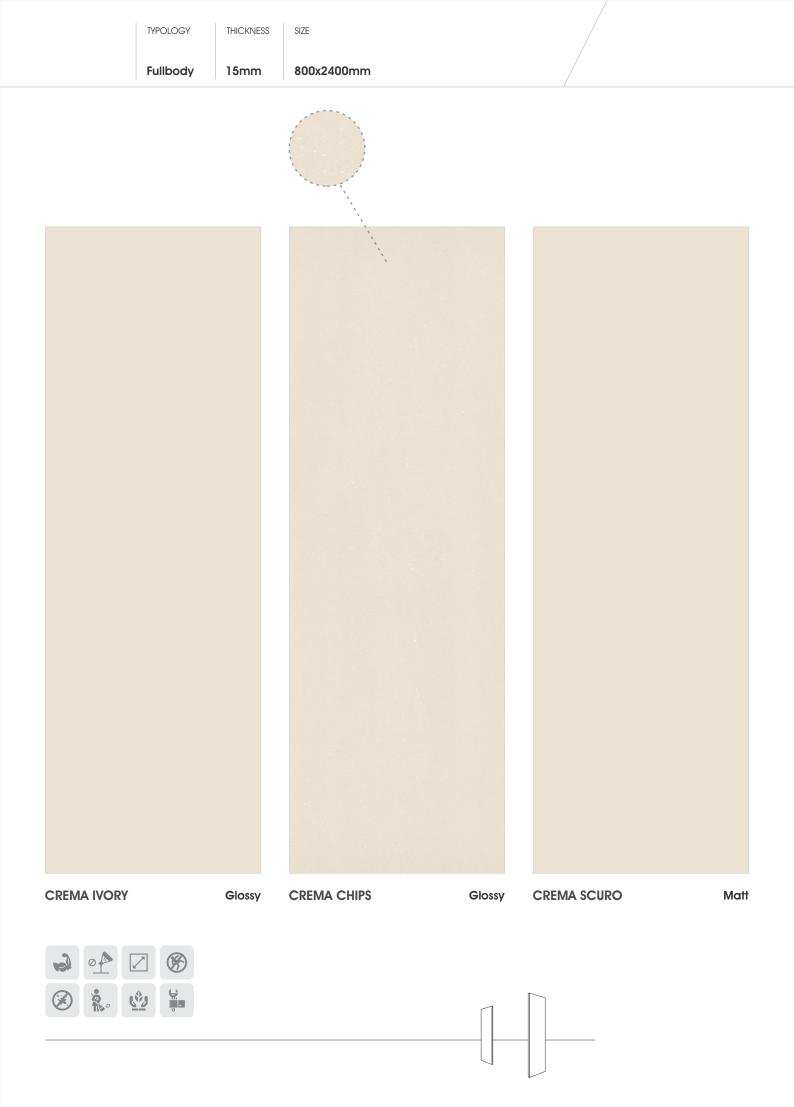


TYPOLOGY	THICKNESS	SIZE
Fullbody	15mm	800x2400mm





leture the perfection in every aspect

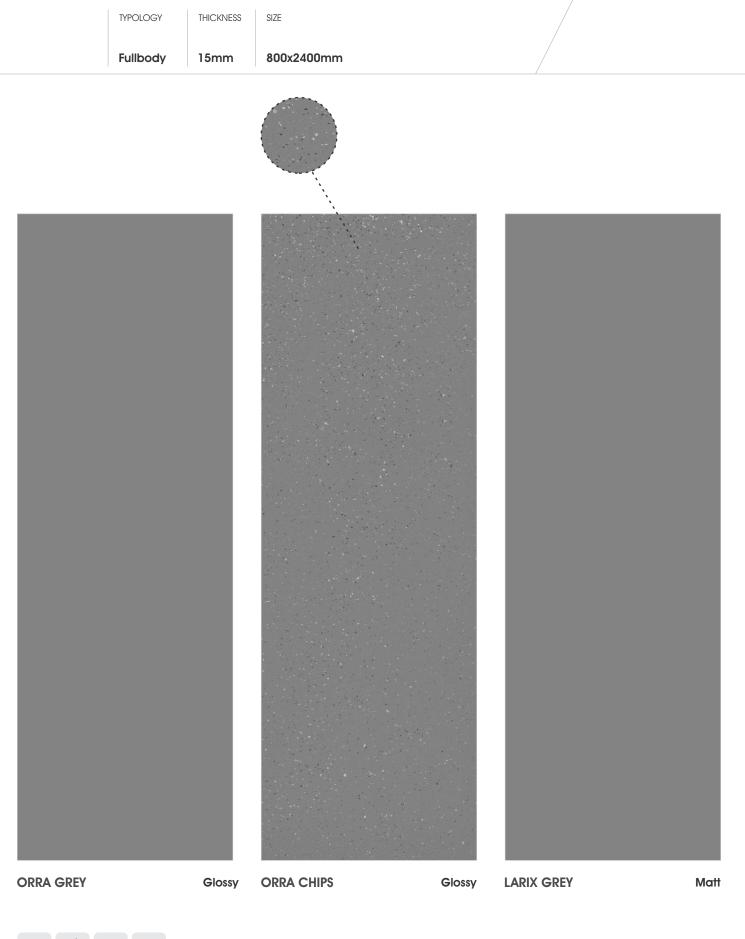





Fullbody


THICKNESS

15mm


SIZE

800x2400mm


leture the — perfection in every aspect

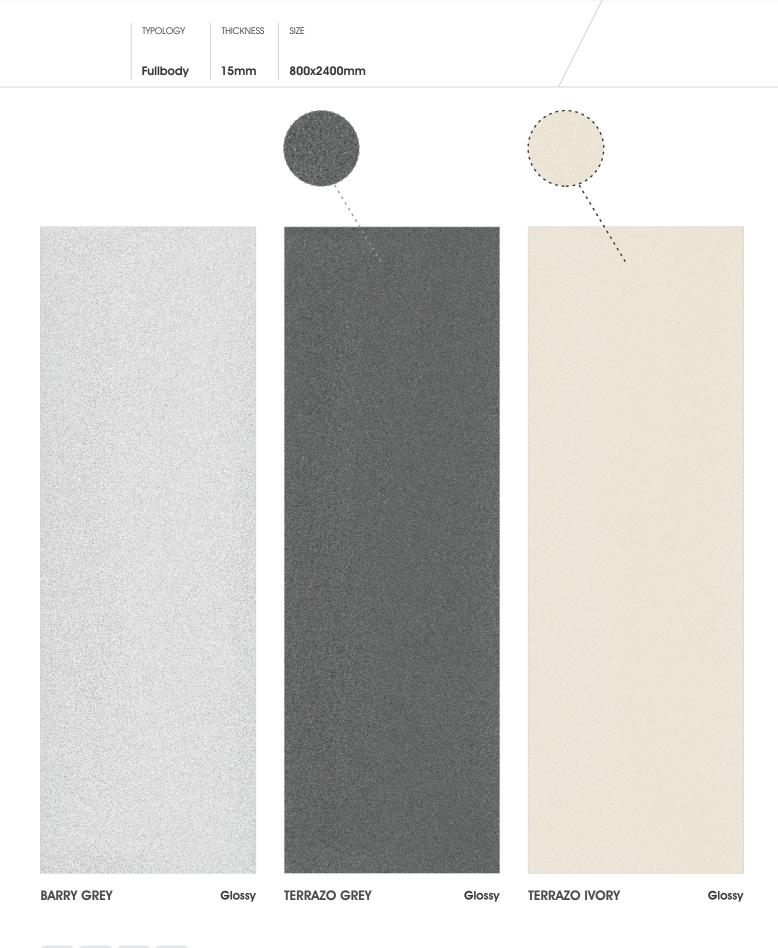



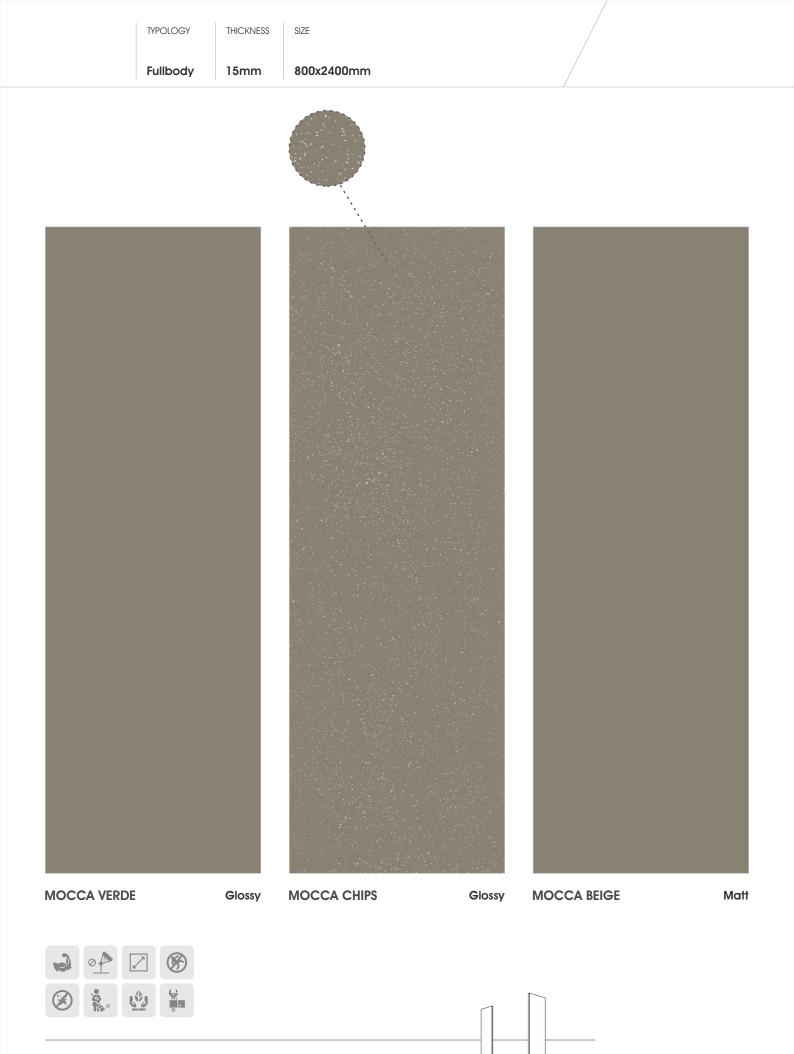


TYPOLOGY	THICKNESS	SIZE
Fullbody	15mm	800x2400mm

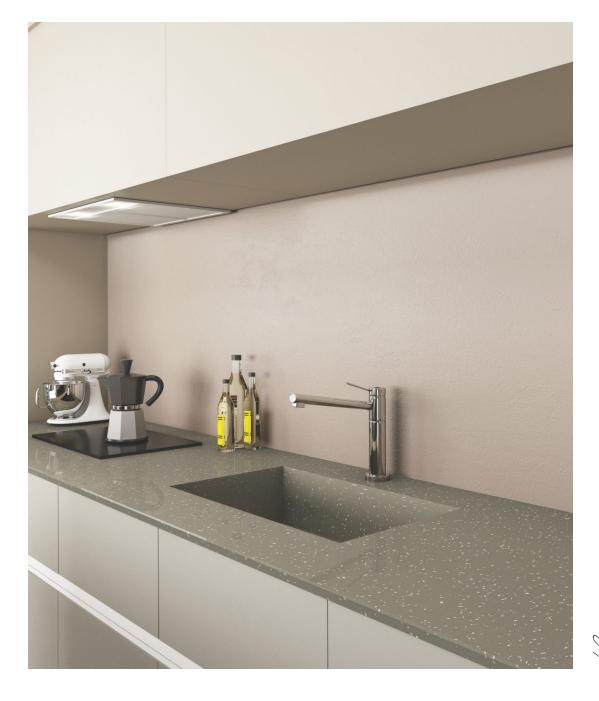




leture the perfection in every aspect

TYPOLOGY	THICKNESS	SIZE	
Fullbody	15mm	800x2400mm	/

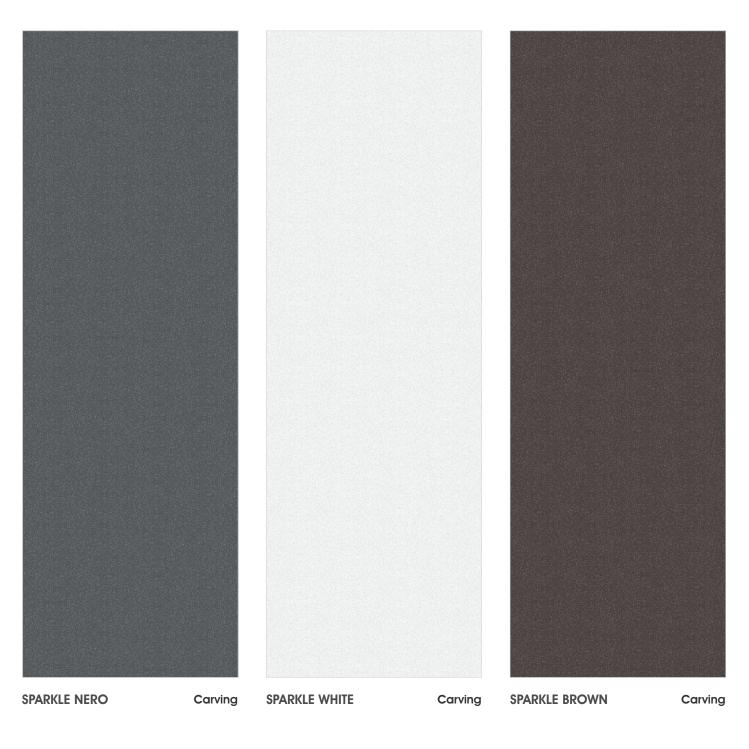



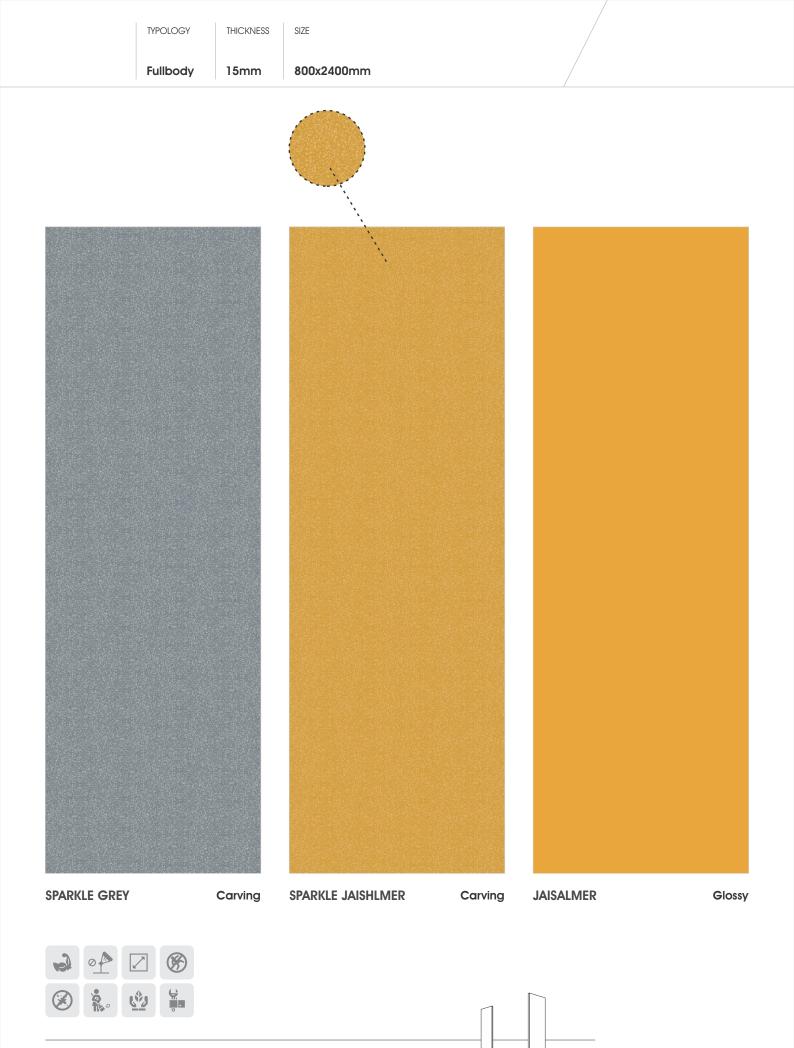



Fullbody

THICKNESS

15mm

SIZE

800x2400mm

leture the — perfection in every aspect



Jaisalmer


TYPOLOGY	THICKNESS	SIZE		
Fullbody	15mm	800x2400mm	/	



LAKHA RED

Glossy



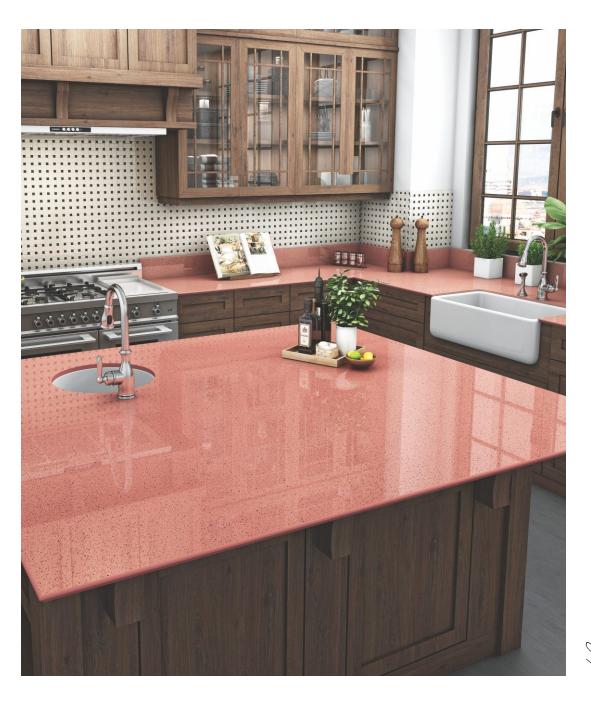



leture the — perfection in every aspect

15mm

800x2400mm

Fullbody

TECHNICAL SPECIFICATION OF OUR TILE

TEST DISCRIPTION			
CHARACTERISTIC	TEST METHOD	STANDARD AS PER ISO-13006/EN14411 GROUP	OUR VALUE
Deviation in Length	IS-13630-1	±0.50%	±0.10%
Deviation in Width	IS-13630-1	±0.50%	±0.10%
Deviation in Thickness	IS-13630-1	±5.00%	±5.00%
Straightness of Sides	IS-13630-1	±0.50%	±0.10%
Rectangularity	IS-13630-1	±0.60%	±0.15%
Surface Flatness	IS-13630-1	±0.50%	±0.20%
Surface Quality	IS-13630-1	Min. 95%	Min. 95%
PHYSICAL PROPERTIES			
Water Absorption	IS-13630-2	≤0.50%	≤0.50%
Modulus of Rapture(N/mm2)	IS-13630-6	Min. 35N/mm²	Min. 37N/mm²
Breaking Strength(N)	IS-13630-6	<7.5mm-700N ≥7.5mm-1300N	≤7.5mm-1000N ≥7.5mm-1400N
Moisture Expansion(mm/m)	IS-13630-3	0.06 Max	0.01 Max
Scratch Hardness of Surface	IS-13630-13	Min. 4	Min. 4
Resistance of Surface Abrasion(Glazed Tiles)	IS-13630-11	As pr Mfg.	Class II Min.
Co-Efficent of Linear Thermal Expansion	IS-13630-4	As pr Mfg.	6.5x10 ^{-0.6} Max.
Thermal Shock Resistance	IS-13630-5	10 Cycles Min.	10 Cycles Min.
Crazing Resistance	IS-13630-9	As pr Mfg.	5 Cycles at 7.5Bar Pressure
Impact Resistance-Coefficent of Restitution	IS-13630-14	As pr Mfg.	0.55 Min
Frost Resistance	IS-13630-10	As pr Mfg.	No Damage
Bulk Density (g/cc)	IS-13630-2	>2.0 gm/cc	>2.0 gm/cc
CHEMICAL PROPERTIES			
Resistance of Staining	IS-13630-8	Class I Min.	Class II
Resistance of Household Chemicals	IS-13630-8	Class AA Min.	Class AA
Resistance to Acids & Alkalis	IS-13630-8	As pr Mfg.	Min. Class A
Slip Resistance	150-13006/EN1444 Group B A	As pr Mfg.	As pr Mfg.